


# PARMA 12T

## Safety features

- EC declaration of conformity of machinery.
- Audible alarm if outriggers setup in unsafe.
- Emergency stop.
- Anti-return valve.
- Manual emergency descent system.
- Proportional hydraulic control in basket.
- Coupling with inertia brake. (If towed).
- Elastic suspension on semi-axle.
- Polyester basket (optional).
- Batteries disconnection device.
- Ends of stroke on stabilisers according to the ground condition.

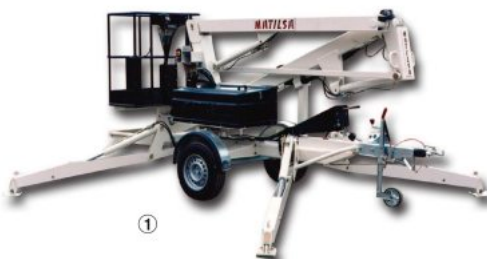

①

## Work Characteristics

This model is equipped with three articulations and a telescopic boom, leading the operator to the most inaccessible places. Its proportional movements provide absolute safety at work.

\* Hydraulic rigid stabilisers with ends of stroke which prevent faulty maneuvers from taking place.



⑦



⑥

\* Frontal view showing the minimum width for transport.


## Structure

The articulations are mounted with hardened and ground steel bolts, which rotate on bushings lubricated caps with greasers.



⑤

\* Hydraulics controls for stabiliser.

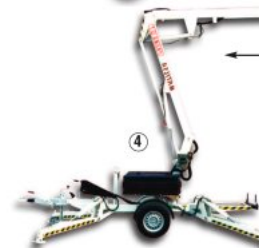

④