



Family

700 SERIE

Model

74/10CGG

Description

4-BURNER GAS RANGE ON GAS OVEN

GAS RANGES

Code

0780039

General characteristics

Outer casing and feet in stainless steel.
Adjustable worktop height, ranging from 840 to 900 mm.
Shaped cooker control panel with knobs slanted towards the operator.
Nickel-plated top burners with stable flame.
Thermocouple safety valve with pilot light.
Acid-resistant black enamelled cast iron burner grates with long spokes suitable for supporting small pots and pans.
Stainless steel drip bowls.
Oven heating with stainless steel burner with self-stabilizing flame, and thermostatically-controlled temperature range from 100 to 300°C.



Technical/functional characteristics

Hob with stabilised flame nickel cast iron burners.
Thermocouple safety valve with pilot flame.
Thermocouple protected by a dome-shaped protection.
Black acid-resistant grilles made of enamelled cast iron with long prongs to support small pots.
Stainless steel drip tray basins.
3.5 and 5, 6 kW burners, all with a double crown.GN 2/1 oven dimensions.
Rounded upper corners (r= 10 MM).
Removable grille holder with anti-tipping guides on 3 levels, 52 mm pitch
Enamelled bottom oven
Oven door thermal insulation.
Heating by means of self-stabilised flame stainless steel burner.
Adjusted via a safety valve with thermocouple.
Piezoelectric ignition.
Temperature adjusted from 100 to 300 °C via a thermostat.

Technical Data


Model	74/10CGG
Width (mm)	800
Depth (mm)	730
Height (mm)	870
VOLUME	0.8
WEIGHT	140
Supply	-

74/10CGG
800
730
870
0.8
140
-

Gas power (KW)	26,2
Electric power (KW)	-
Internal ovens dimension(mm)	-
OVEN CAPACITY	-
Plate dimensions (mm)	-
TANK DIMENSIONS	-
Tank capacity (Lt)	-

26,2
-
-
-
-
-
-

1

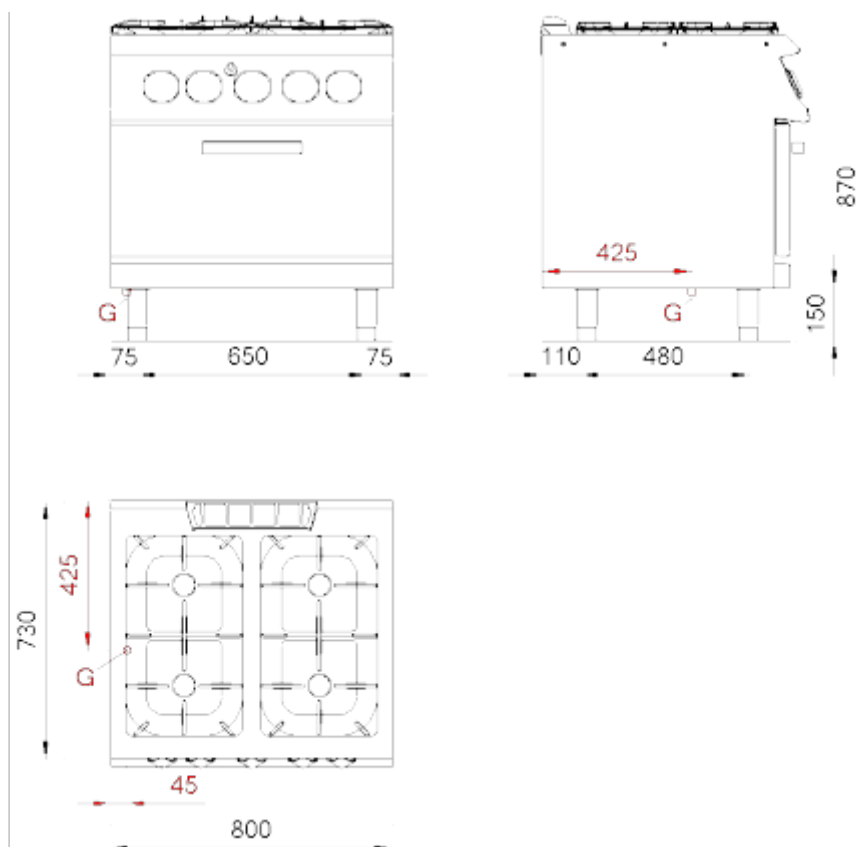

Connection	Power	Diameter	Supply
Gas connection (Ø)	-		
Electric connection (V/~ /HZ)	-		
Cold water connection (Ø)		1/2"	
Cold water connection (Ø)		-	
Hot water connection (Ø)		-	
Cold soft water connection (Ø)		-	
Drain (Ø)		-	
Drain 2 (Ø)		-	